


Cross section of track adjacent to existing walls.

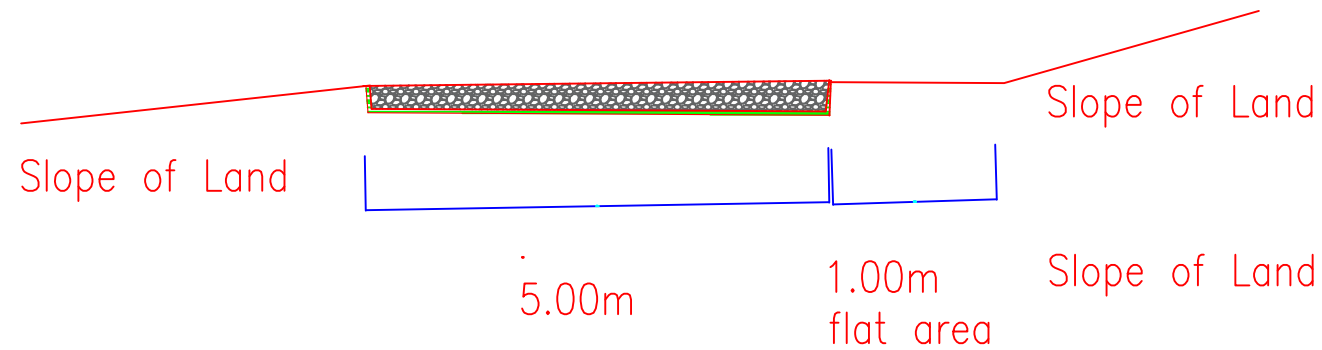

Cross section of track in open field.

Specification:

Excavate a trench at least 5.0 m wide and at least 150mm deep, or down to a naturally occurring hard surface.

Profile the edge of the track with the excavated soil

Overlay the area with a geotextile membrane if the base of the trench lies on subsoil (a geotextile membrane is not needed if the base is bedrock or chalk).

Fill the trench with stone or hardcore to a depth of at least 150mm, and compact it.

Finish the top of the track with a finer material (of 18mm to dust) to a depth of 25 to 50mm, and compact it into a convex camber or lay to fall of ground.

Direct any track runoff to a ditch or other stable drainage outlet, or divert it on to grassland.

NOTE: All detail dimensions should be checked on site and any discrepancies noted PRIOR to any work commencing

Project
Lodge Hill Farm
Whitby
YO22 5AZ
NORTH YORKSHIRE
THE MULGRAVE ESTATE

Drawing Title
Cross Sections through Track

Survey Date
October 2019

Scale
NTS

Drawing Number
MUL / ML / 01