

# GGL/GPL Conservation Roof Window



The VELUX Conservation roof window provides all the technically superior features of a VELUX Roof Window in a traditional black conservation style including glazing bar/s. The GGL centre-pivot and GPL top-hung windows are manufactured in high quality natural pine with a clear lacquered pine internal finish.

The Centre-pivot (GGL) is manually operated and is recommended by VELUX for higher reach windows. To watch an illustration of how the window operates [click here](#).



The Top-hung (GPL) is manually operated and is recommended by VELUX for lower level installation and is ideal for shallower roof pitches. It is also suitable for escape purposes. To watch an illustration of how the window operates [click here](#).

## Features/Benefits

- Ventilation bar with dust and insect filter – *Allows fresh air to enter the room while the window is securely closed*
- Friction springs – *Allows easy operation of window*
- Sash rotates 180° from inside – *Allows easy and convenient cleaning*
- Barrel bolt – *Allows the window to be locked in two positions – At 180° for secure cleaning of the exterior pane internally – At 5° to allow extra ventilation*

## Operation

GGL – The window is operated manually using the full width control bar on the ventilation flap along the top of the sash.  
 GPL – The sash which is top-hung is opened and closed using the bottom handle and can remain open in any position up to 45°.


## Glazing options

- (--50) glazing Double glazed, toughened outer pane. Also available in;
- (--60) glazing Double glazed, laminated inner pane, toughened outer pane with Easy-to-clean coating, enhanced noise reduction.
- (--70) glazing Double glazed, laminated inner pane, toughened outer pane.

## Cladding

- NCS standard colour (Black), Nearest RAL standard colour: 9005.

## Sizes (cm)

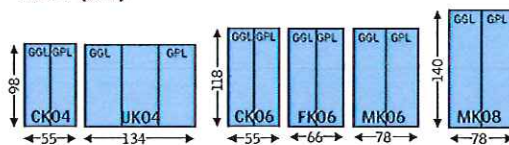

### Centre-pivot

Tiles 15-90°  
 Tiles (recessed) 20-90°  
 Plain tiles 25-90°  
 Slate (recessed) 20-90°



### Top-hung

Tiles 15-55°  
 Tiles (recessed) 20-55°  
 Plain tiles 25-55°  
 Slate (recessed) 20-55°

TOP HUNG - For roof pitches from 55°-75°, please specify special springs when ordering.

## Maintenance

The pane should be cleaned with a soft, clean, lint-free cloth or non-abrasive sponge. The rest of the window can be cleaned with ordinary household cleaners. The filter can be removed and either washed or replaced.

For further advice on maintenance please [click here](#).

## Guarantee

- 10 year VELUX guarantee on windows and flashing kits.
- 3 year guarantee on blinds, shutters, awnings and electrics.


[Click here](#) for further information regarding the VELUX guarantee.

## Interior finish option

- GGL
  - White paint finish.

- GPL
  - White paint finish.

## Best practice installation

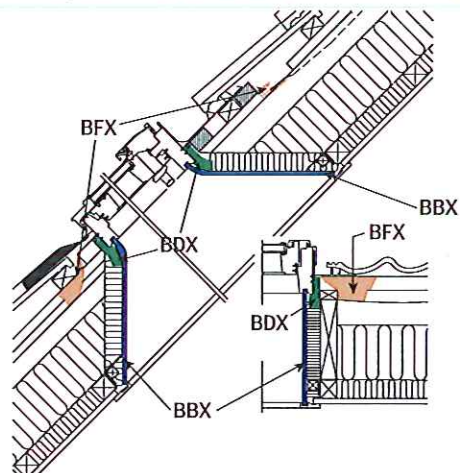


# Technical data – GGL/GPL Conservation

Size	Window Options	Exterior Frame WxH	Visible Glass exf	Lining Rebate
				kl
CK04	GGL	550 x 978	371 x 783	495 x 919
CK06	GGL	550 x 1178	371 x 983	495 x 1119
FK06	GGL	660 x 1178	481 x 983	605 x 1119

Size	Window Options	Exterior Frame WxH	Visible Glass exf	Lining Rebate
				kl
MK06	GGL	780 x 1178	601 x 983	725 x 1119
MK08	GGL, GPL	780 x 1398	601 x 1203	725 x 1339
UK04	GGL	1340 x 978	1161 x 783	1285 x 919

Please refer to GGL and GPL Technical data Sheets for further information.

# VELUX flashings

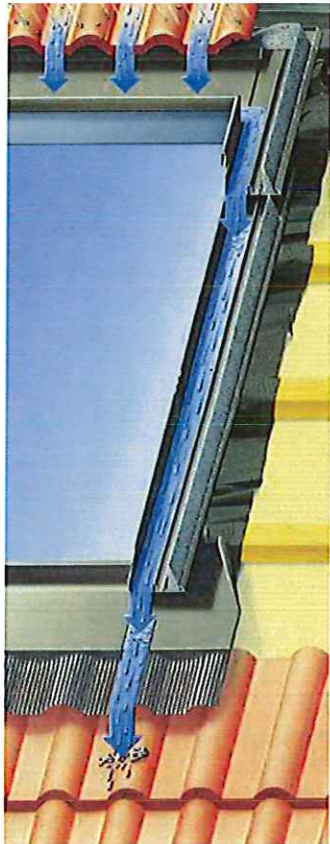

VELUX flashings ensure weathertight installation of all VELUX Roof Windows, and have several unique features.

### Installation

VELUX flashings are easy to install. A perfect and discreet installation is ensured in the roofing material. The roofing material conceals the top and side flashing components.



### Materials

VELUX exterior flashings are manufactured in corrosion proof materials. The colours of the materials match the cladding of the roof window. A thoroughly tested construction and composition of materials ensures a complete and weather-resistant flashing.



### Watertight

The flashing components overlap each other to create weather tight joints whilst the foam gasket creates a seal between the flashing and the roofing materials.



### Apron

In profiled roofing material the pleated apron is dressed to form a tight seal.



### Water drainage

The construction of the flashings ensures safe drainage of water from the roof above the window.



### Maintenance

Leaves and other debris should be removed from any flashing once a year to allow rainwater to run freely. Heavy snow should not be allowed to lie on the flashing for long periods of time.




### Guarantee

10 year VELUX guarantee on all Flashing Products.

For more information on VELUX flashings [click here](#).



## Flashing --Z




Flashing --Z is used for flat and profiled roofing materials with a profile height up to 45mm, e.g. interlocking tiles. Not for interlocking slate or profiled sheeting.

**Applications**



## Flashing --W



Flashing --W is used for flat and profiled roofing materials with a profile height up to 120mm, e.g. pantiles, corrugated roofing sheets, etc. Can also be used for thatched roofs and interlocking slate.

**Applications**

Flashing for flat and profiled roofing materials:

**Combinations**

**EDZ/W**  
Single flashing



**EEW**  
Flashing for roof terrace



**EFW**  
Flashing for roof window combined with vertical window element



**EKW**  
Combi flashing for combined installation of two or more roof windows



**EBW**  
Twin flashing for side-by-side installation of two windows or more



**ETW**  
Additional flashing for downward extension window



**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

**Materials**

For more information on VELUX flashings [click here](#).

# Flashing --P

**25°-90°**

Flashing --P is used for installations into plain tiles with a maximum thickness of 15mm and maximum length 340mm.

**Applications****Flashing for plain tile:**

**EDP**  
Single flashing



**EBP**  
Twin flashing for side-by-side installation of two windows


**Combinations**

**EKP**  
Combi flashing for side-by-side installation of two windows or more




**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

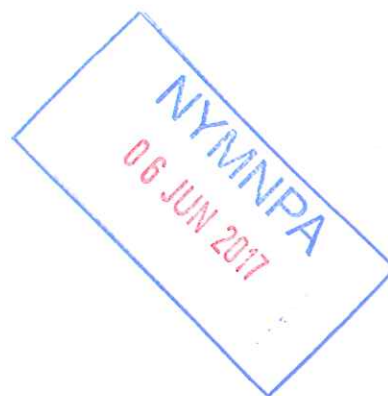**Materials**

For more information on VELUX flashings [click here](#).

## EDJ Recessed



The EDJ tile flashing is for recessed installation of one VELUX Roof Window into a flat or profiled roofing material up to 90mm.

The EDJ 2000 Recessed Flashing Includes: BDX Insulation Collar and BFX Underfelt Collar.

**Applications**

## EKJ Recessed Combi



The EKJ tile flashing is for the recessed installation of more than one VELUX Roof Window into a flat or profiled roofing material up to 90mm.

**Applications**

Flashing for flat and profiled roofing materials:

**EDJ**  
Single flashing



**EFJ**  
Flashing for roof window combined with vertical window element



**EKJ**  
Combi flashing for combined installation of two or more roof windows



**ETJ**  
Additional flashing for downward extension window



**Combinations**

**Standard:**  
Grey aluminium


**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

**Materials**

For more information on VELUX flashings [click here](#).



# Flashing --L



Flashing --L is used for flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

**Applications**

## Flashing for flat roofing materials:

**EDL**  
Single flashing



**EEL**  
Flashing for roof terrace



**EFL**  
Flashing for Roof Window combined with vertical window element



**EKL**  
Combi flashings for combined installation of two or more roof windows



**EBL**  
Twin flashing for side-by-side installation of two windows



**ETL**  
Additional flashing for downward extension window



**Standard:**  
Grey aluminium

**Flashing variants:**  
Titanium zinc, copper or aluminium – special colours

## Combinations

## Materials



For more information on VELUX flashings [click here](#).

## EDN Recessed



Flashing --N is used for recessed installation in flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

The EDN 2000 Recessed Flashing Includes: BDX Insulation Collar and BFX Underfelt Collar.

### Applications

## EKN Recessed Combi



The EKN Combi Flashing is used for recessed installation in flat roofing materials up to 8mm, i.e. slate, roofing felt, etc. Cannot be used for interlocking slate.

### Applications

Flashing for flat roofing materials:

### Combinations

EDN  
Single  
flashing



EFN  
Flashing  
for Roof  
Window  
combined  
with vertical window  
element



EDN  
Combi  
Flashing for  
combined  
installation of two or  
more roof windows



ETN  
Additional  
flashing for  
downward  
extension window




Standard:  
Grey aluminium

Flashing variants:  
Titanium zinc, copper or aluminium –  
special colours

### Materials

For more information on VELUX flashings [click here](#).

## Window Replacement – EW



Allows the replacement of pre 2001 VELUX Roof Windows with the current window variant, into the existing aperture.


The EW flashing comes with an Insulation Collar as standard.

Flashing EW is used for flat or profiled roofing materials up to 120mm i.e. interlocking slate, pantiles, etc

**Applications**

**Features**

## Window Replacement – EL



Allows the replacement of pre 2001 VELUX Roof Windows with the current window variant, into the existing aperture.

The EL flashing comes with an Insulation Collar as standard.

Flashing EL is used for slate up to 8mm thick.

**Applications**

**Features**



Before



After



For more information on VELUX flashings [click here](#).