

Planning

From: Helen Webster
Sent: 20 June 2017 12:00
To: Planning
Subject: FW: NYM/2017/0222/FL-COBER HILL
Attachments: Deep bottom.pdf; meeting rail.pdf; outer.pdf

From: Fersina Windows [mailto:[mailto:](#)]
Sent: 20 June 2017 11:58
To: Helen Webster
Subject: NYM/2017/0222/FL-COBER HILL

Dear Helen,

I enclose construction details for the flush casement windows. Please note there are also 50 mm and 70 mm outer frames available. I have sent the 60 mm middle option and usually decide after detailed survey which is the most appropriate for the context. It is almost always the case that it is the 60 or 70 mm that is used. The same outer frame is usually used for a whole job.

I hope these details clarify clause 3 of the conditions.


Assuring you of my best attention at all times.



Regards


Alan Walker

DEEP BOTTOM SASH RAIL & 60mm OUTER

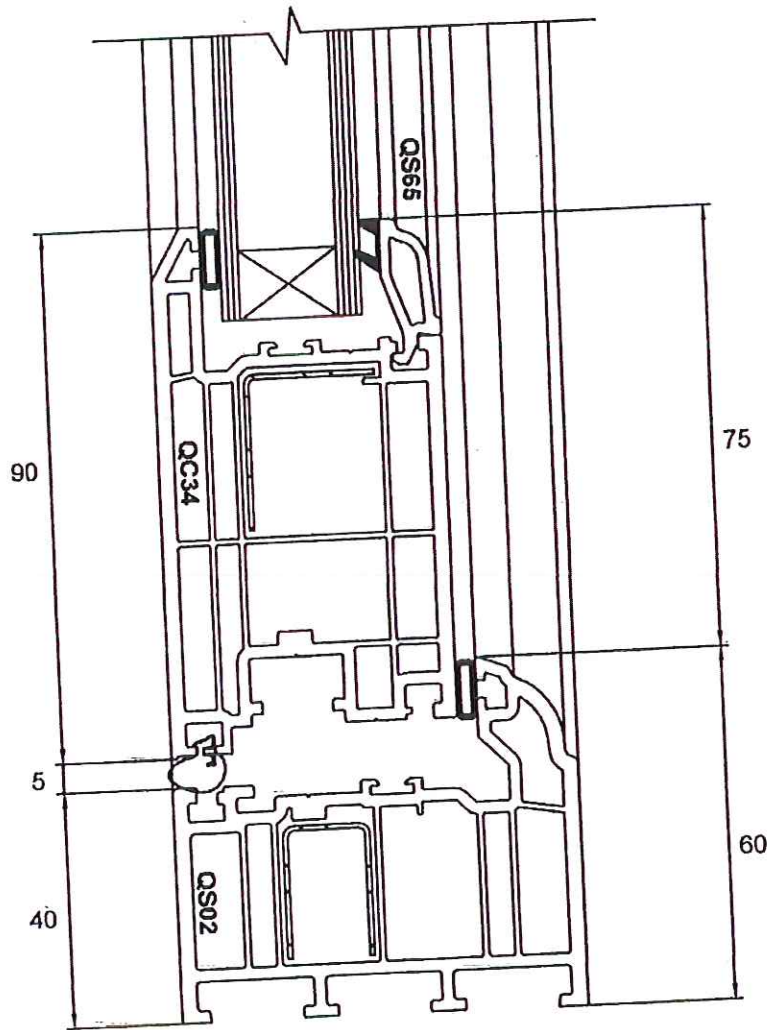


NYMNP
20 JUN 2017

MEETING RAIL / FLUSH SASH TO SASH

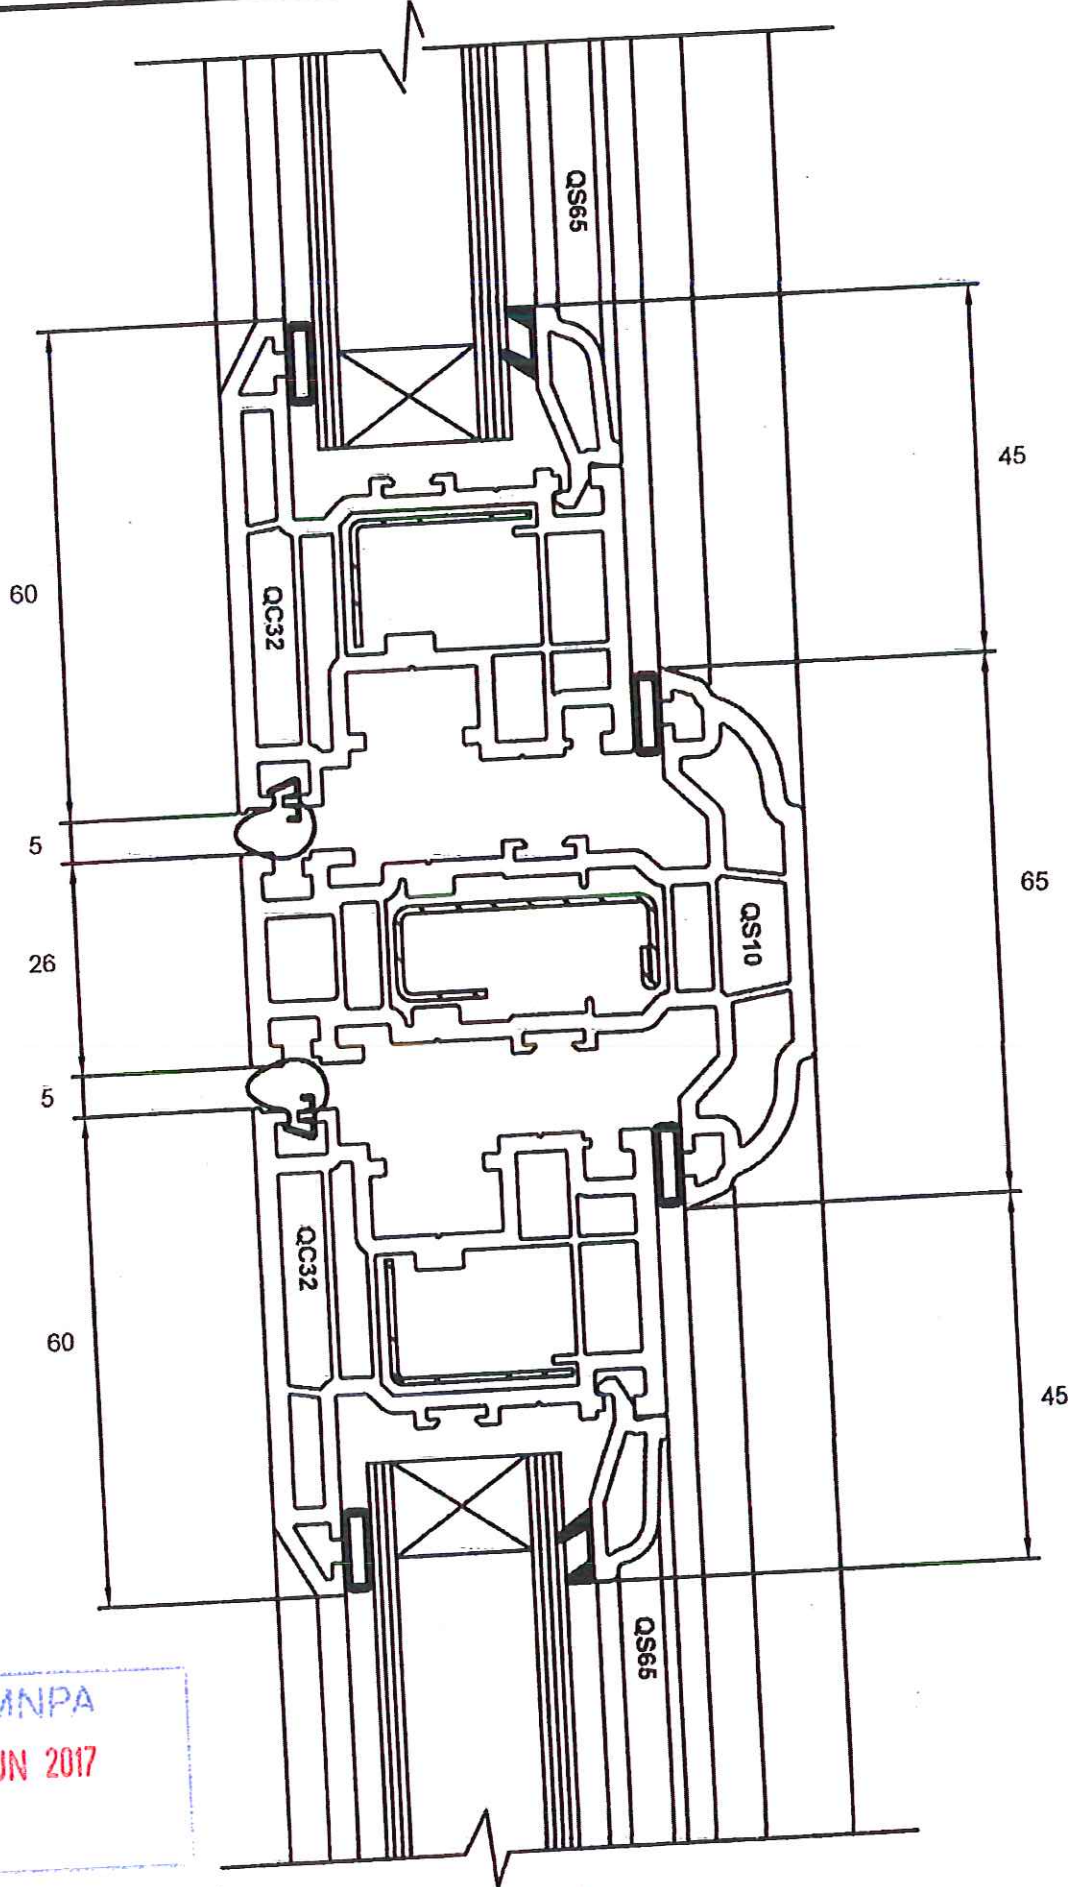

NYMNP
20 JUN 2017

60mm OUTER & FLUSH SASH

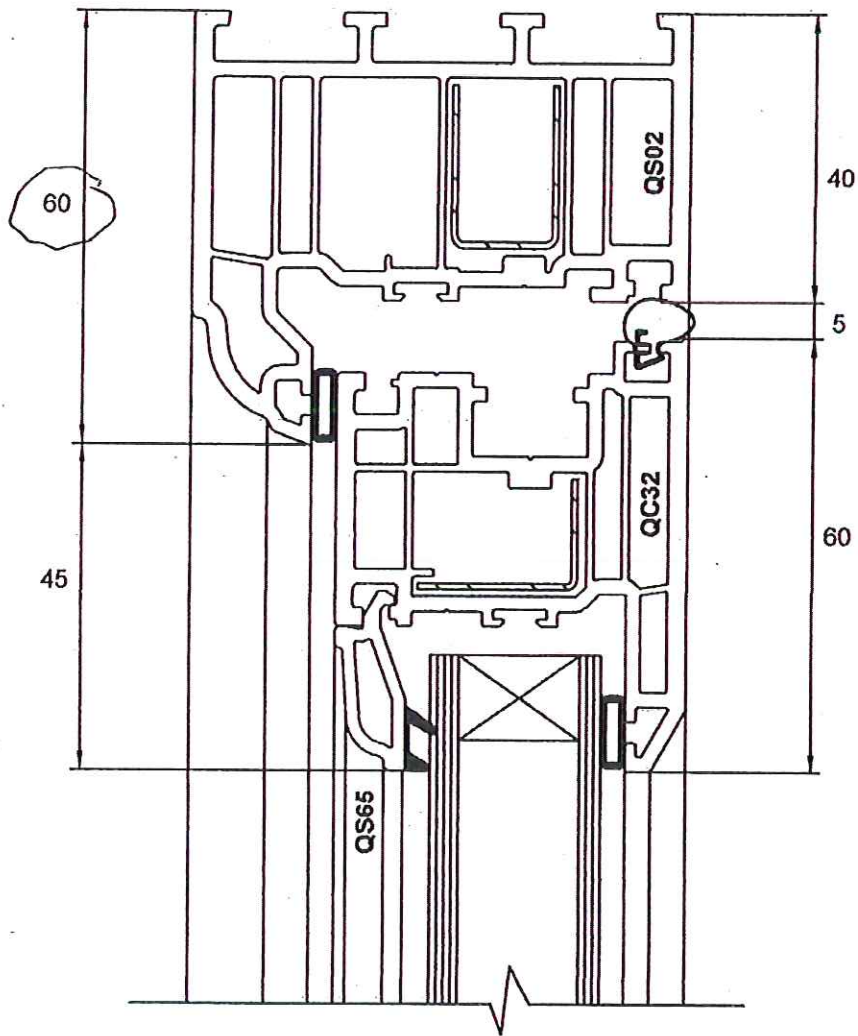

NYMNP

20 JUN 2017