
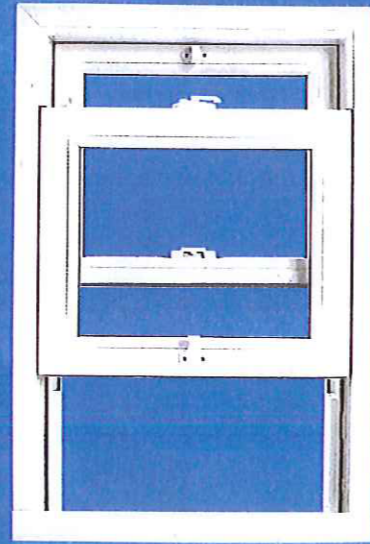


NYM / 2010 / 0 7 2 6 / FL  
The Vertical Slider Window System  
from VEKA

- Outstanding weather performance
- Traditional features
- Optional Georgian bars
- Choice of colours
- Maximised Window Energy Rating
- Slimline sash

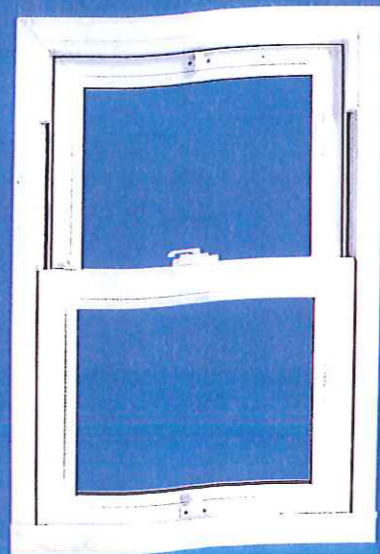

VEKA plc

VEKA plc Farrington Road, Rossendale Road Ind. Est, Burnley, Lancashire, BB11 5DA.



NYM / 2010 / 0 7 2 6 / FL



Vertical Slider Window System

For the best profile... anywhere



# The VEKA Vertical Slider

## The choice of fabricators:

Advanced design enables quick and efficient frame fabrication and glazing with a maximum frame size of 1400mm X 2400mm.

## The choice of installers:

Slimline outer frame (136mm X 68mm) improves installation flexibility – but retains complete compatibility with existing VEKA fixing brackets.

## The choice of homeowners:

A great looking window ensures strong demand from the retrofit sector as well as new-build. The pleasing slimline appearance belies a high performance energy efficient design. Slimline sashes offer improved window aesthetics and maximised Window Energy Rating performance.

## The choice of specifiers:

VEKA remains the No.1 choice of social and commercial specifiers throughout Britain and Ireland with a reputation second-to-none for technical excellence and superb good looks.


## More choice

### Cill:

- Universal design allows for either overhanging or stub cill.
- Rear projection resulting in less complex fabrication and improved weather performance. Standard leg detail enables the use of existing VEKA fixing brackets.

### Horns:

- Without horn
- Screw-on horn
- Machined into upper jambs

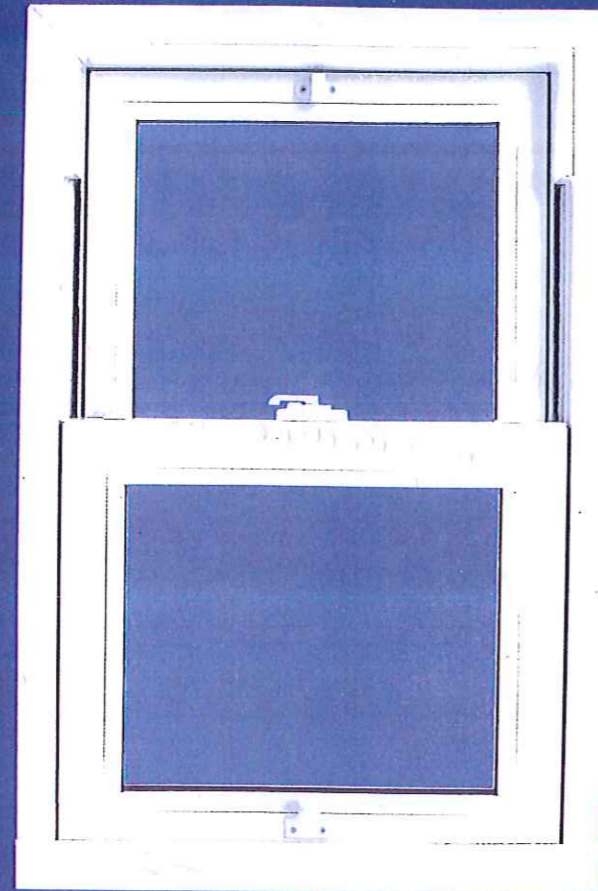


### Finish:

- Brilliant white
- Golden Oak foil on caramel profile
- Rosewood foil on brown profile

### Gearing:

The system is designed with bespoke gearing features to give fabricators free choice to use components from any of the major gearing suppliers including heavy duty spring balances. Gearing features within the profile allow correct and secure location of gearing fittings. It also allows fitting of trickle vents within the head of the frame.

## ... a modern classic window system

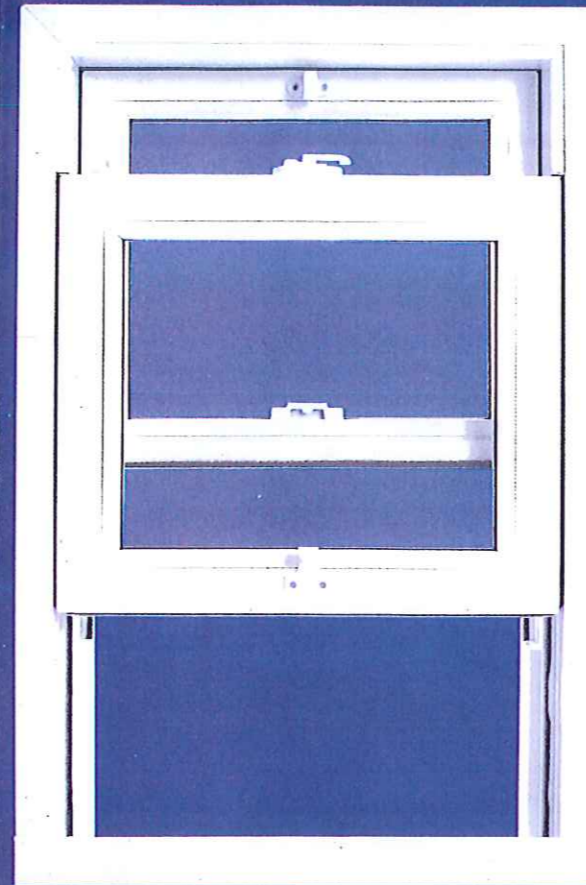

### Glazing thickness:

The system is designed primarily to accommodate a 28mm glazing thickness but can be used with any of the Matrix 58 bead range to give a variety of thicknesses.

### Bottom sash:

The system offers two bottom sash options: four-sided fully-welded or three-sided welded with mechanically coupled deep bottom rail.

